

BALL REBOUND TESTER

EN

ASTM
D3574

DIN
EN ISO
8307

Digital measuring device with downpipe, sensors and connected electronic unit for determining the ball rebound resilience through the free fall of a ball on soft, elastic, polymeric foam materials.



The elasticity of polymeric foam materials can be analyzed by measuring the rebound height of a ball after the free fall and impact on a test specimen.

The vertical alignment of the measuring device guarantees the undisturbed fall of the ball. The minimum thickness of the plane-parallel samples is of 50 mm. Given the practical fastening of the downpipe, its support height can be permanently adjusted to the thickness of the test specimen. Thanks to a magnetic holder, the ball remains securely adjusted until the start, being released manually with the help of the hand-wheel, at the beginning of the measuring process. After the ball hits the test specimen, sensors determine the rebound height. Depending on the selected mode, the electronic unit records the individual value, as well as the median or average value of several measurements, showing them on the display.

MEASURING METHODS

Single measurement

Median values of several measurements according to DIN EN ISO 8307

Average values of several measurements according to ASTM D 3574


BALL REBOUND TESTER

EN

ASTM
D3574

DIN
EN ISO
8307

MAIN CHARACTERISTICS

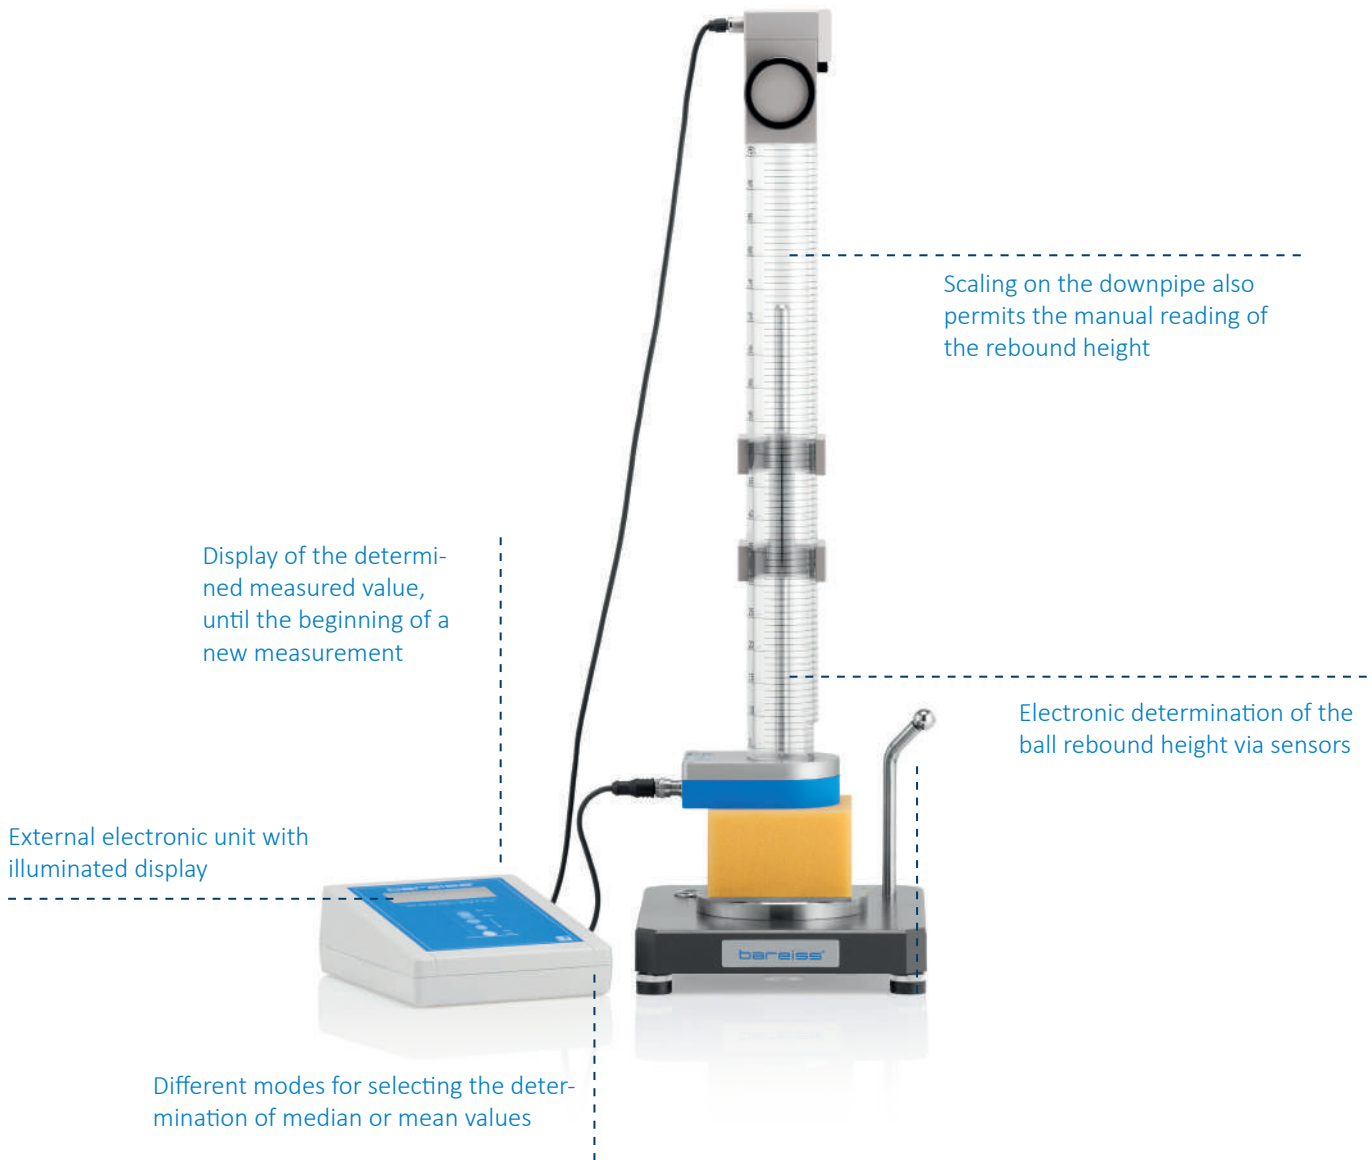

Display of the determined measured value, until the beginning of a new measurement

External electronic unit with illuminated display

Scaling on the downpipe also permits the manual reading of the rebound height

Electronic determination of the ball rebound height via sensors

Different modes for selecting the determination of median or mean values

TECHNICAL SPECIFICATIONS

Measurements Test stand W x D x H:
200 x 250 x 600 mm

Measurements Electrical unit W x D x H:
200 x 171 x 90 mm

Weight Test stand 9 kg

SCOPE OF DELIVERY

Test stand with support table and scaled downpipe, drop height 500 mm

External electronics unit

Test ball

Operating manual

BALL REBOUND TESTER

EN

ASTM
D3574

DIN
EN ISO
8307

ACCESSORIES



**Facility calibration
certificate for the
measuring device**



Software

The software controls the hardness and hysteresis measurement processes undertaken with Bareiss testing devices.



EKF downpipe

drop height optionally
460 mm or 500 mm, with
mounting arm and magnet
system

MADE IN GERMANY SINCE 1954.

Bareiss Prüfgerätebau GmbH

DAkS-Kalibrierlaboratorium

Breiteweg 1

89610 Oberdischingen, Germany

Tel +49 (0) 7305 / 96 42-0

Fax +49 (0) 7305 / 96 42-22

sales@bareiss.de

 bareiss.de

 Facebook

 LinkedIn

 www.bareiss.tv



Deutsche
Akkreditierungsstelle
D-K-15206-01-00

The accreditation is valid for the scope listed in certificate D-K-15206-01-00 (mechanical measurands in the range of hardness).